



FILE AMEND NOTE	DATE	REV.
ORIGINAL EDITION	June 24, 2021	A/0

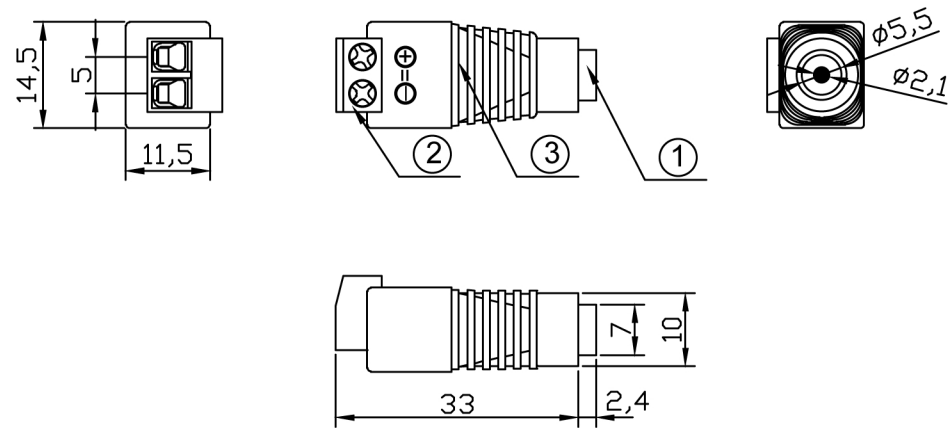


NOTE:

Electrical test:
100% open short & miss wire test.
Suitable for 26-16AWG wire.
Terminal block withstand voltage: Max 300V. 16A
Material RoHS 2.0 and REACH Compliant.

PACKAGE

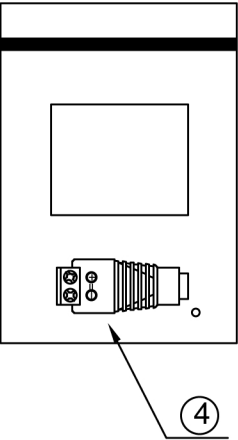

MATERIAL LIST

④	PACKAGE	1PC/PE BAG+BARCORDER STICKER	1	DRAW No.		NAME	DC 2.1*5.5 female to terminal block 2 pin		
③	MOLD HOOD	PVC, COLOR: BLACK	1				MAPE	TOLERANCE	
②	TERMINAL	2 PIN TERMINAL BLOCK, PA66, COLOR: GREEN, PITCH: 5.0MM	1					X. ±1.00	X.X ±0.50
①	CONNECTOR	DC 2.1*2.5 FEMALE, NICKEL PLATED SHELL	1	APPROVE BY	CHECK BY	DRAW BY	SCALE	MM	
No.	PART NAME	DESCRIPTION	QTY				PAGE	1/1	