


Pin Assignment

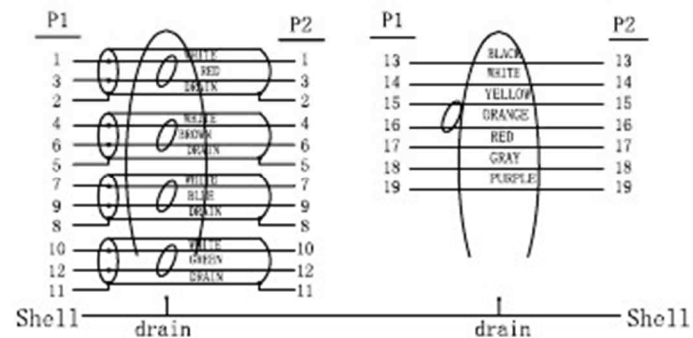

ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 4 OHM (MAX)
3. INSULATION RESISTANCE: 10M OHM (MIN)
4. HI-POT TEST: DC 300V/10ms

CABLE MARKING:

HIGH SPEED HDMI® CABLE E***** (UL) AWG STYLE 20276 VW-1 80°C 30V *****

10	Black Heat Shrink Tube: ϕ 1.5	0.032	M
9	Black Heat Shrink Tube: ϕ 2.0	0.08	M
8	HDMI F Transparent PVC Dust Cover	1	pcs
7	HDMI M Transparent PVC Dust Cover	1	pcs
6	HDMI F Black ABS jacket	1	pcs
5	HDMI F 19P PCB Gold Plated Black	1	pcs
4	45P Black PVC RoHS	20	g
3	Transparent PE RoHS	6	g
2	HDMI M 19P Gold Plated	1	pcs
1	UL20276 (30AWG*1PR+EAM)*4C-30AWG*1PR+30AWG*5C-AEB 50%AL OD:5.5MM BLACK Marking:HIGH SPEED HDMI® CABLE ... STYLE 20276 VW-1 80°C 30V	5	m

REV.	ECN NO.	DESCRIPTION	DATE	NAME
		TOLERANCE INCHES		
		M/M		
	.X	.015		
	.XX	.010		
	.XXX	.005		
DRAWN BY		CUSTOMER :		
CHECK BY		CUSTOMER P/N:		
		SCALE	NONE	DRAWING NO:
		UNIT	MM	REV A01

TITLE: HDMI M TO F 30AWG Gold

CUSTOMER :

CUSTOMER P/N:

SCALE

NONE

DRAWING NO:

UNIT

MM

REV
A01