



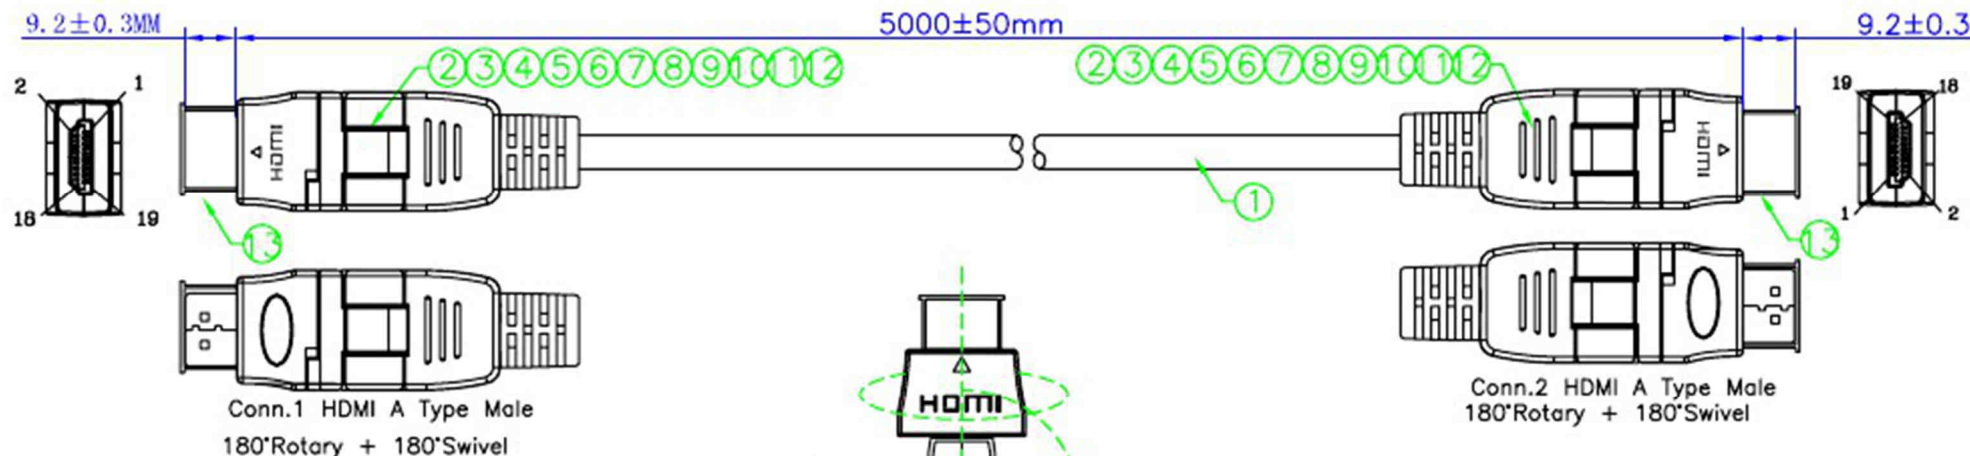

ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

Pin Assignment

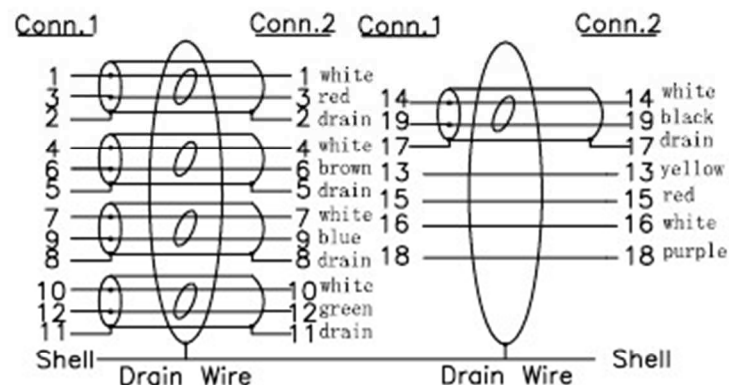

③	HDMI M Transparent PVC Dust Cover	2	pcs
②	HDMI M 360°Rotating Head SR Location ABS UP Casing Black	2	pcs
①	HDMI M 360°Rotating Head SR Location ABS Lower Casing Black	2	pcs
①	HDMI M 360°Rotating Head Center Location ABS UP Casing Black	2	pcs
⑨	HDMI M 360°Rotating Head Center Location ABS Lower Casing Black	2	pcs
⑧	HDMI M 360°Rotating Head Plug Location ABS UP Casing Black	2	pcs
⑦	HDMI M 360°Rotating Head Plug Location ABS Lower Casing Black	2	pcs
⑥	45P Black PVC RoHS	12	g
⑤	Black Heat Shrink Tube: φ1.0	0.09	M
④	Black Heat Shrink Tube: φ2.0	0.1	M
③	Black Heat Shrink Tube: φ0.6	0.27	M
②	HDMI M 19P Gold Plated	2	pcs
①	UL20276 (7/0.10T*1PR+EAM)*5C+7/0.10T*4C+AEB (16*4/0.12AL) OD:6.0MM BLACK	5.01	M

		TOLERANCE		TITLE: HDMI TO HDMI swivel cable		
		INCHES	M/M			
.X	.015	.30				
.XX	.010	.10				
.XXX	.005	.05				
DRAWN BY			CUSTOMER :			
			CUSTOMER P/N :			
CHECK BY			SCALE	NONE	DRAWING NO.:	REV A01