



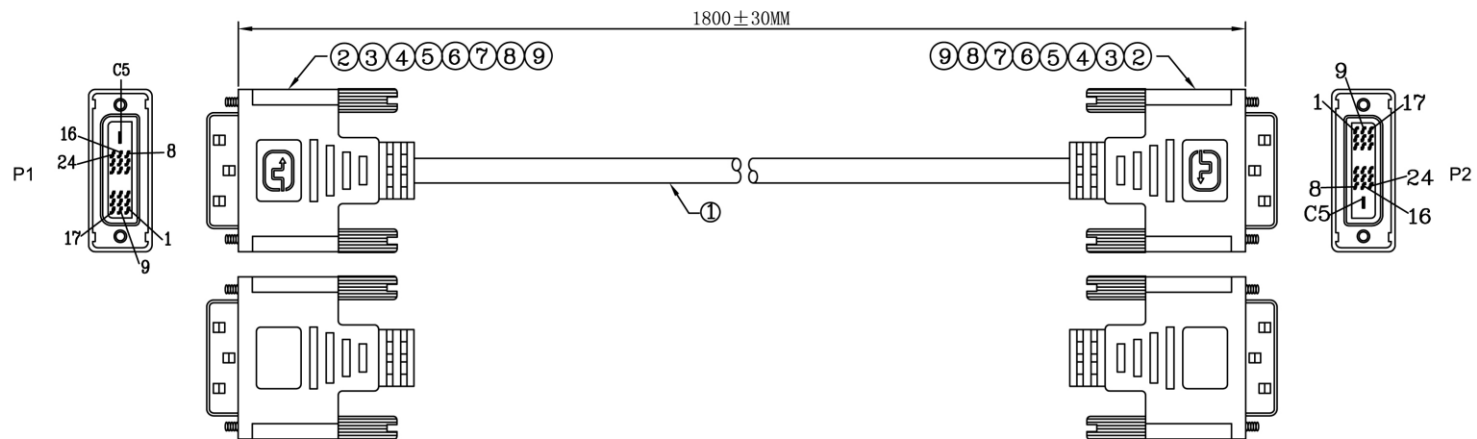

ELECTRICAL TEST:

- 1.100% OPEN SHORT SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

PIN Assignment

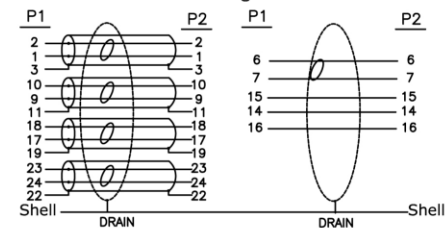

9	DVI M Dust cap	2	pcs	REV.		DESCRIPTION	DATE	
8	H.S.T:Ø1.5*20mm	0.04	m	TOLERANCE INCHES M/M			TITLE: DVI/DVI 28AWG	
7	H.S.T:Ø1.0*12mm	0.096	m					
6	H. S. T: Ø 2.5*10mm	0.08	m					
5	PE	8	G	DRAWN BY		CUSTOMER :	ICI	
4	#4-40UNC 2.8*45MM Screw nickel plated	4	pcs	CHECK BY		CUSTOMER P/N :	ICOC DVI-8000	
3	45P Black PVC	42	g	APPD BY		SCALE	NONE	REV. A01
2	DVI (18+1)M Solder Insulation:Black shell nickel plated	2	pcs			UNIT	MM	
1	UL20276 (28AWG*1PR+EAW)*4C+28AWG*1PR+28AWG*3C+AEB 65%ALMG OD:7.3MM Jacket color:Black Mark:E342987 (UL) AWM STYLE 20276 80C 30V VW-1 DVI CABLE	1.8	M			DATE	2016.7.12	1/2
NO	DESCRIPTION	Q'TY	UNIT					