


I-CASE LIGHT-06

Overall photos:

NO.A1

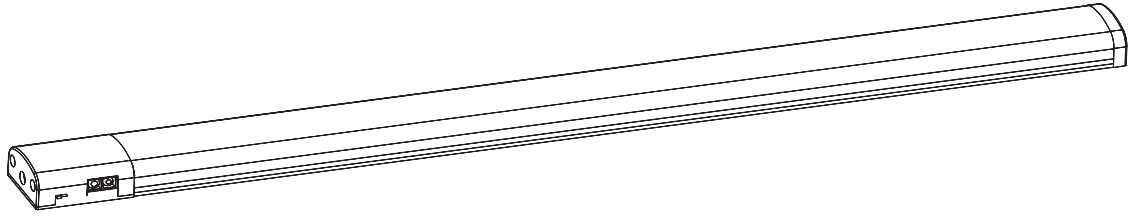

L: 325mm

Applications:



LED show case lighting; LED under counter lighting; LED display case lighting; LED retail product Lighting; LED Furniture Lighting; LED bookcase lighting; LED wardrobe lighting; LED under cabinet lighting; LED kitchen cabinet lighting; LED cove lighting; LED accent lighting; LED task lighting etc.

Product Specifications	
Material	Aluminum + PC
Parts	Mounting hardware, Screws
Dimensions	25mm (W) x 13.5mm (H) x325mm(L)
Light Source:	High brightness SMD2835 LED
Operating Temperature:	-20°C to 45°C - Indoors
Warranty:	1 years with proper installation
Installation:	2pcs M2.5 screws allows easy installation
Ingress Protection Grade:	IP20

Technical Operating data:

a. Common function:


Technical - Electrical Data	I-CASE LIGHT-06
Rated wattage	3.0W
Rated lamp efficacy	65lm/W
Maximum Current	0.275A
Rated voltage	12V DC
Led quantity	12pcs
Luminous flux	220lm
Color Temp	6500k
Angle	120°
Lifespan	25000H

b. Intelligent function:

●IR Sensor function:

(1)Insert an **IR sensor** switch in the middle of light.


(2)The detection distance is about 4-5cm.

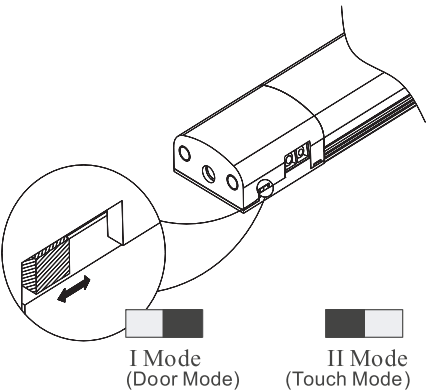

Mode switch
Two modes can be chosen:
a. “shift” button in right of light, it is door mode
if there is a static object in the range of 5cm in front of sensor, the light will turn off, when the object is removed, the light will turn on.
b. “shift” button in left of light, it is touch mode.
When finger/hand nearby the sensor, light will be on/off .


This light has the indicator light function.

Product size:

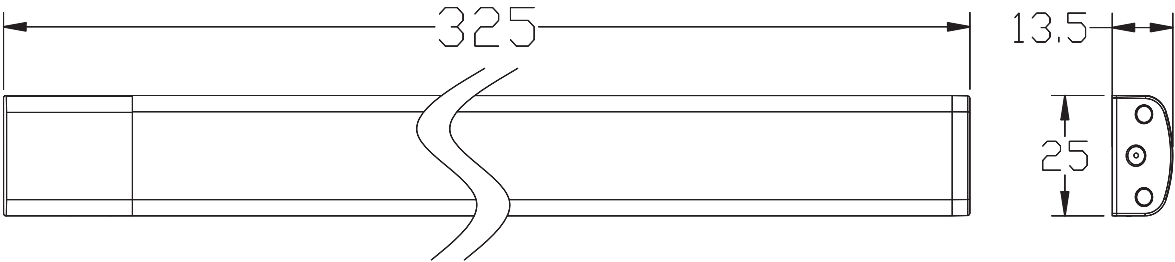


Installation information:

Magnet is already installed on the back of fixture.meeting

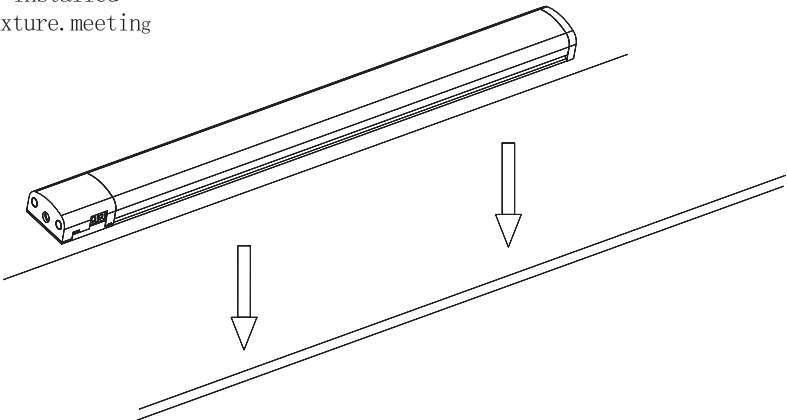

Requirement for mouting surface:
iron or material that can attach to magnet

Complete set connection guide:



1PCS+Driver