




Electrical Test:

- 100% Test(open,short,miss wire)
- Contact Resistance: 3ohm (MAX)
- Insulation Resistance:DC 300V/10ms,10M ohm(MIN)

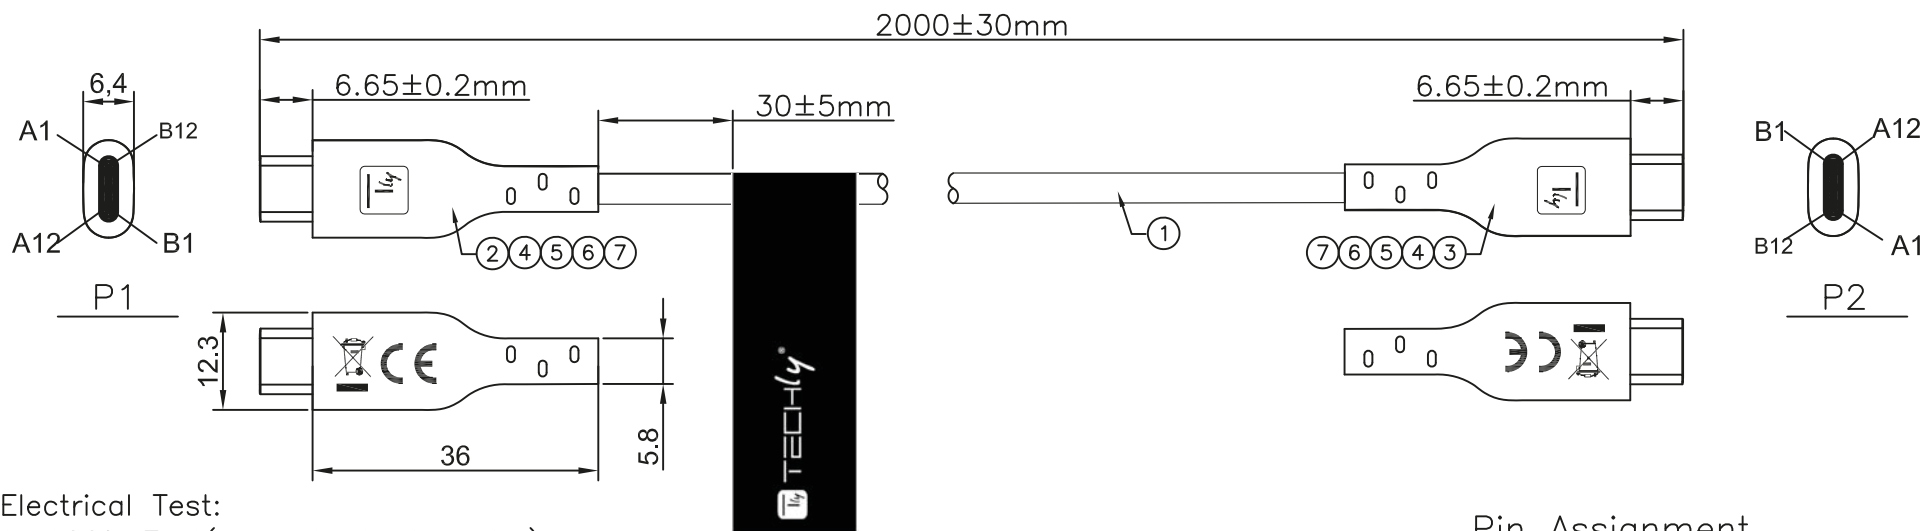

Pin Assignment

P1	P2
(B4,B9,A4,A9) VBus	VBus
(B5) Vconn	Vconn
(A5) CC	CC
(A7) D-	D-
(A6) D+	D+
(A1,A12,B1,B12) GND	GND
Shell	Shell

8	LABEL~85*15MM	1	pcs
7	PVC~45P~BLACK	16	g
6	Low pressure molding material	2	g
5	USB TYPE C~LOWER TIN	2	pcs
4	USB TYPE C~UPPER TIN	2	pcs
3	TYPEC-USB2.0 C Type Connector PCBA~WITH E-MARK~SUPPORT 240W~NI PLATED	1	pcs
2	TYPEC-USB2.0 C Type Connector PCBA~NI PLATED	1	pcs
1	OD:4.0MM~BLACK	1.99	m
NO	DESCRIPTION	Q'TY	UNIT



Cod.: ICOC MU2AC-240W2
Art.: 366457z

Rev.	ECN NO.	Description	Date	Name
		TOLERANCE INCHES M/M		
		.X .015 .30		
		.XX .010 .10		
		.XXX .005 .05		
Title: USB2.0 CM TO CM~L=2m~240W				